

ZF 6 M

Vertical offset, direct mount marine transmission.

Description

- Reverse reduction marine transmission with mechanically actuated multi-disc clutches .
- Suitable for high performance applications in luxury sailboats, motoryachts, fishing boats, etc. .
- Robust design also withstands continuous duty in workboat applications .
- Fully works tested, reliable and simple to install .
- Design, manufacture and quality control standards comply with ISO 9001 .

Features

- Lightweight and robust aluminum alloy casing (sea water resistant) .
- Case hardened and precisely ground gear teeth for long life and smooth running .
- Output shaft thrust bearing designed to take maximum propeller thrust .
- Compact, space saving design .

Options

- Control cable bracket for mounting of push-pull cable to the control lever .
- BW and SAE 6 bell housings .
- Engine-matched torsional coupling .
- Oil cooler. To be used when input power exceeds following values: - Pos. «A» not required - Pos. «B» 25kW .
- Classification by all major Classification Societies on request .



ZF 6 M

Ratings

Pleasure Duty

	RATIOS		MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2800 rpm		3000 rpm		3600 rpm		
							kW	hp	kW	hp	kW	hp	
■	2.045	1.864	63	46	0.0066	0.0088	18	25	20	27	20	27	5000
■	2.722	2.150	45	33	0.0047	0.0063	13	18	14	19	17	23	5000

Ratio 2.045 Max input power 20 kW
 'A' POS = continuous running position (normally AHEAD). 'B' POS = reverse position.
 For all "M" (Mechanical) transmissions reduce power capacity by the following shock factors:
 1 cylinder engine ÷ 1.25, 2 cylinder engine ÷ 1.20, 3 cylinder engine ÷ 1.15

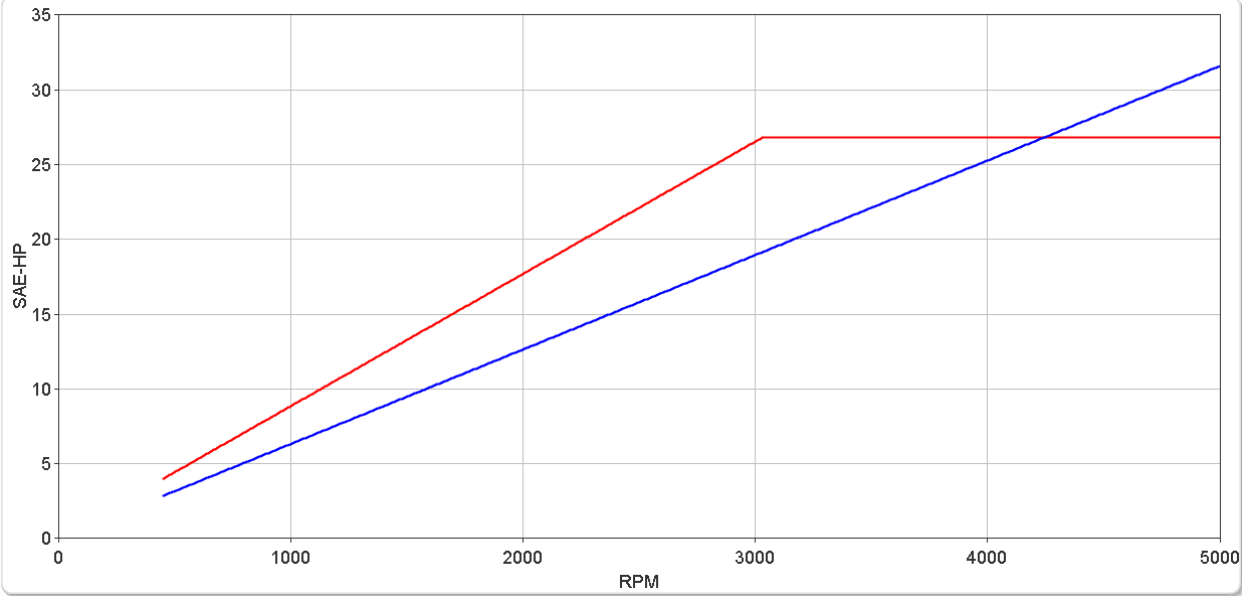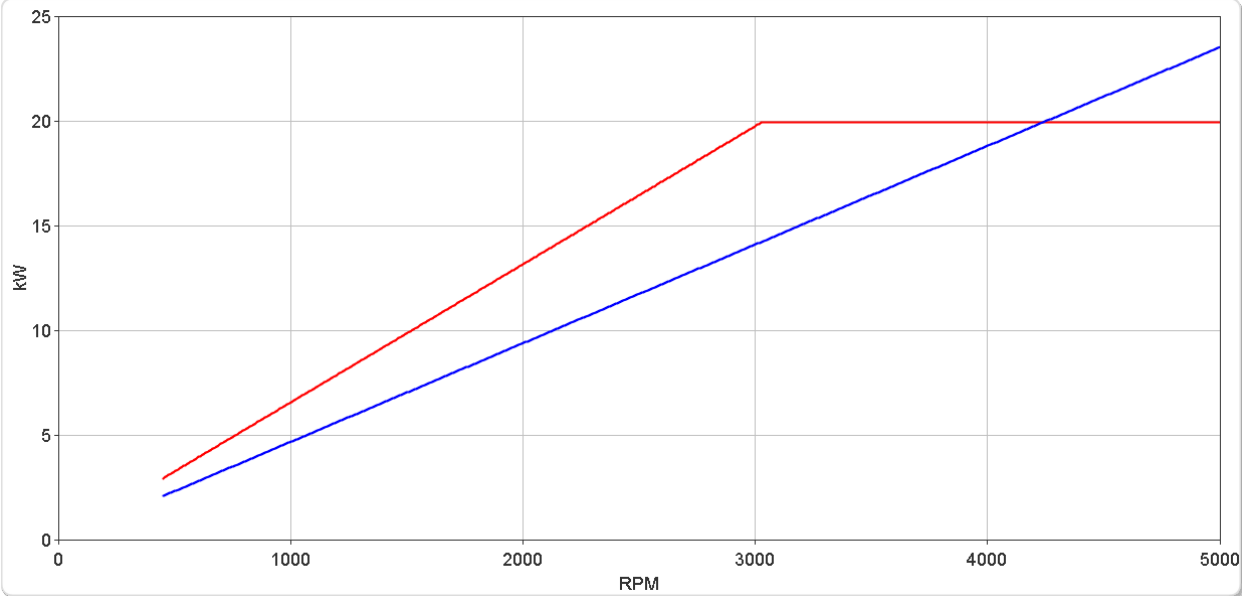

ZF 6 M

Ratings

Light Duty



	RATIOS		MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2800 rpm		3000 rpm		3600 rpm		
							kW	hp	kW	hp	kW	hp	
■	2.045	1.864	57	42	0.0060	0.0080	17	22	18	24	18	24	5000
■	2.722	2.150	41	30	0.0043	0.0058	12	16	13	17	15	21	5000

Ratio 2.045 Max input power 18 kW

'A' POS = continuous running position (normally AHEAD). 'B' POS = reverse position.

For all "M" (Mechanical) transmissions reduce power capacity by the following shock factors:

1 cylinder engine + 1.25, 2 cylinder engine + 1.20, 3 cylinder engine + 1.15

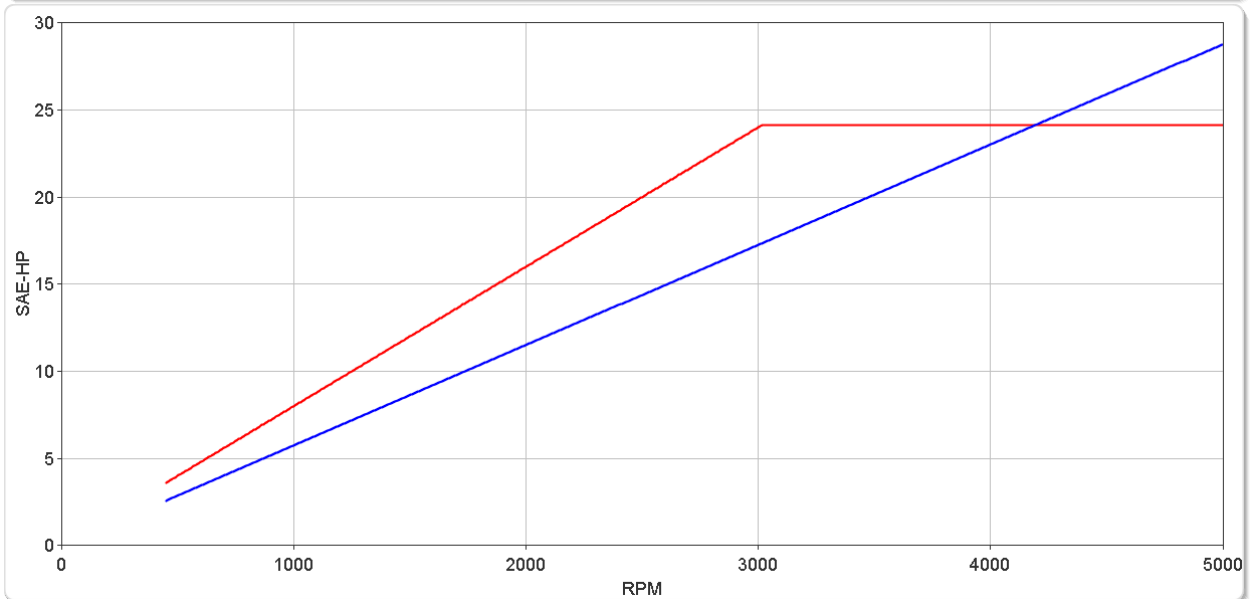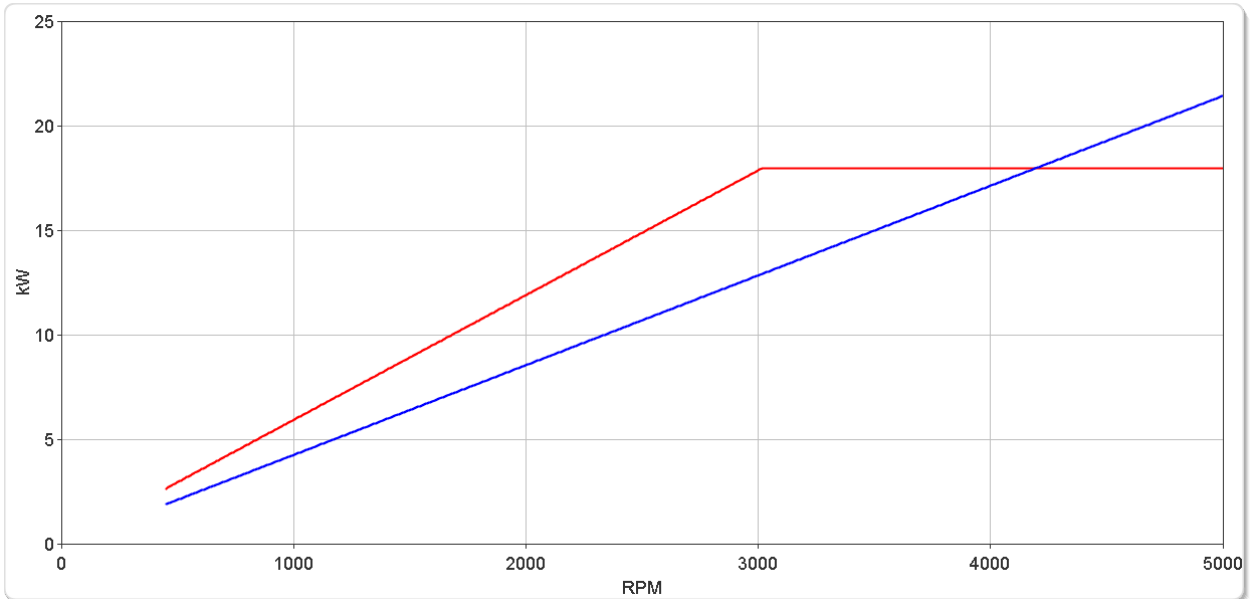

ZF 6 M

Ratings

Medium Duty



	RATIOS		MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2100 rpm		2500 rpm		2800 rpm		
							kW	hp	kW	hp	kW	hp	
■	2.045	1.864	54	40	0.0057	0.0076	12	16	14	19	16	21	5000
■	2.722	2.150	38	28	0.0040	0.0053	8	11	10	13	11	15	5000

Ratio 2.045 Max input power 17 kW

'A' POS = continuous running position (normally AHEAD). 'B' POS = reverse position.

For all "M" (Mechanical) transmissions reduce power capacity by the following shock factors:

1 cylinder engine + 1.25, 2 cylinder engine + 1.20, 3 cylinder engine + 1.15

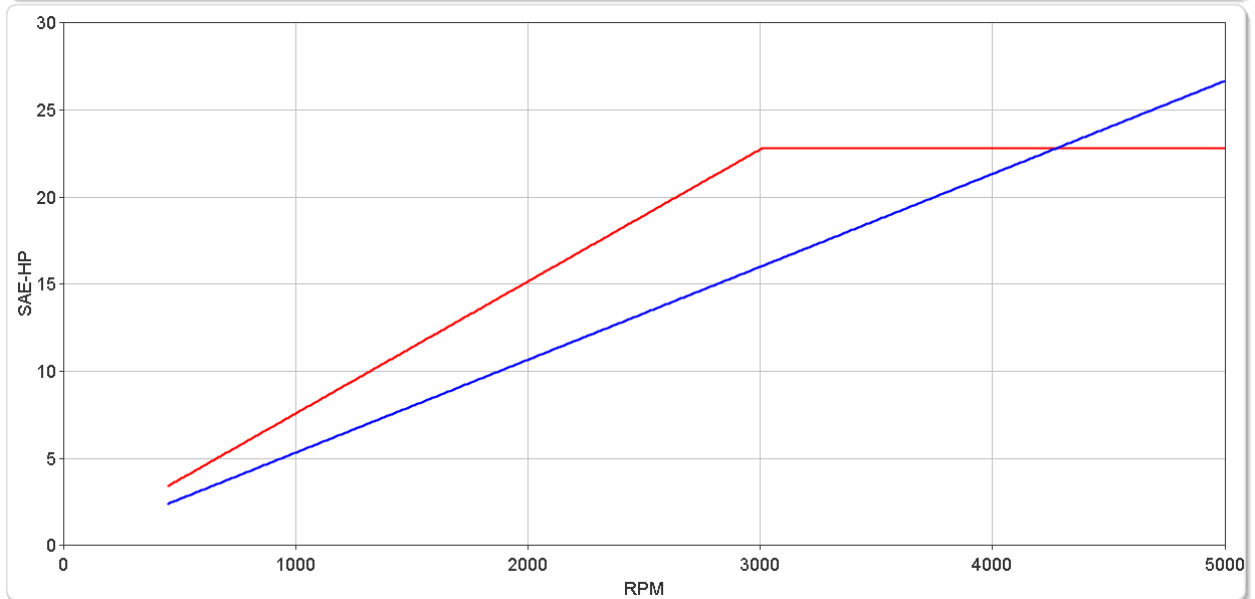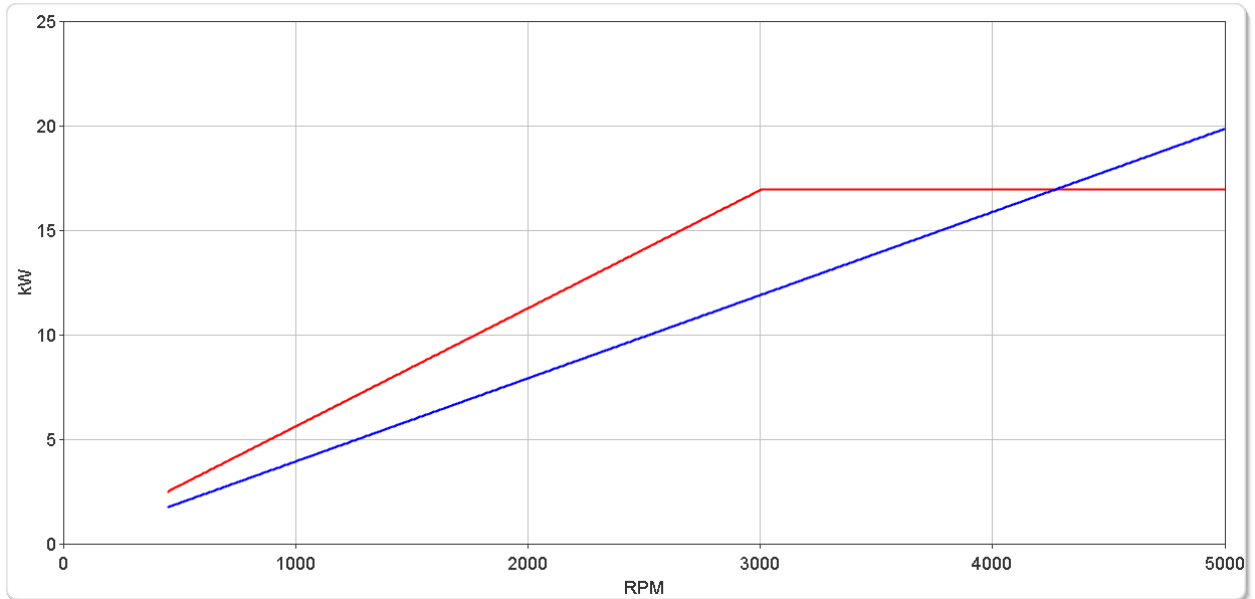

ZF 6 M

Ratings

Continuous Duty



	RATIOS		MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	'A' Pos	'B' Pos	Nm	ftlb	kW	hp	1800 rpm		2300 rpm		2600 rpm		
							kW	hp	kW	hp	kW	hp	
■	2.045	1.864	51	38	0.0053	0.0072	10	13	12	16	14	19	5000
■	2.722	2.150	35	26	0.0037	0.0049	7	9	8	11	10	13	5000

Ratio 2.045 Max input power 15 kW

'A' POS = continuous running position (normally AHEAD). 'B' POS = reverse position.

For all "M" (Mechanical) transmissions reduce power capacity by the following shock factors:

1 cylinder engine + 1.25, 2 cylinder engine + 1.20, 3 cylinder engine + 1.15

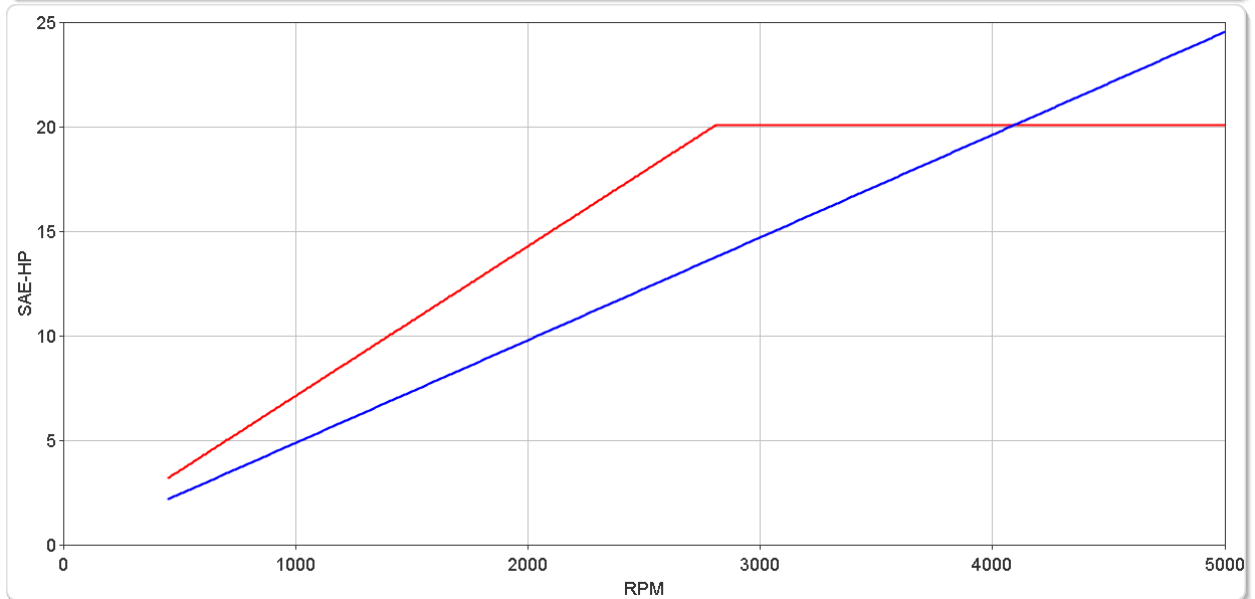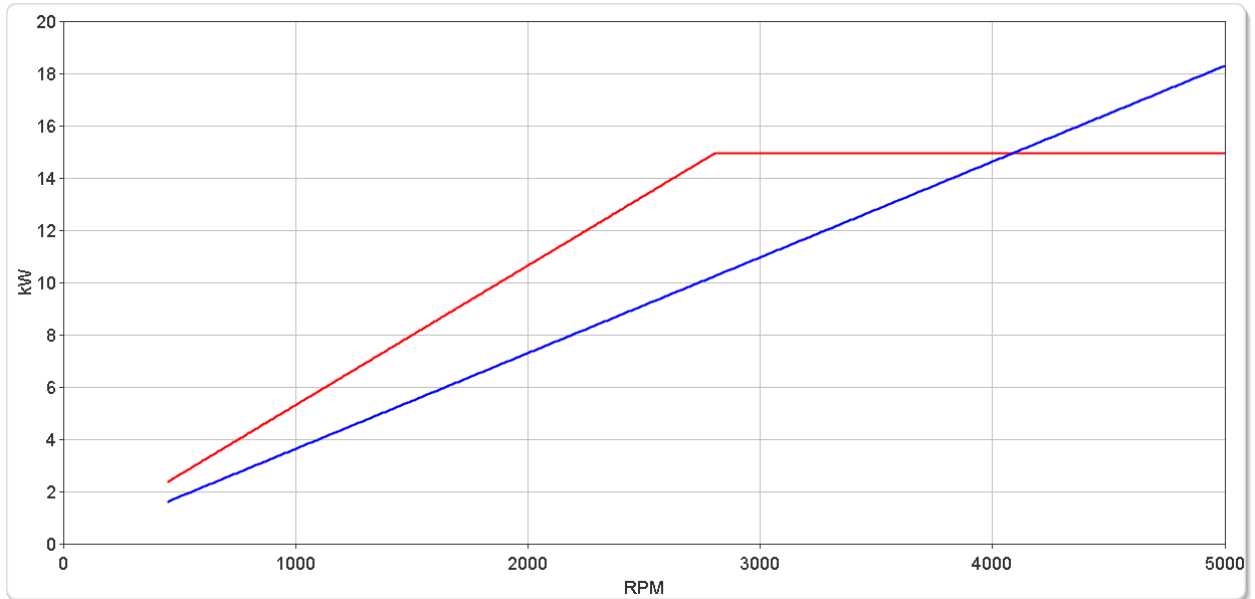

ZF 6 M


Dimensions

None Selected

mm (inches)									
A	B ₁	B ₂	C	H ₁	H ₂	L	L ₂	L ₃	Bell Hsg.
62.0 (2.44)	75.0 (2.95)	128 (5.04)	-	110 (4.33)	73.0 (2.87)	180 (7.09)	60.0 (2.36)	15.0 (0.59)	
Weight kg (lb)					Oil Capacity Litre (US qt)				
10.3 (23.0)					0.42 (0.45)				


SAE Bell Housing Dimensions

SAE No.	A		B		C		Bolt Holes No.	Diameter	
	mm	in	mm	in	mm	in		mm	in
6	266.7	10.5	285.75	11.25	307.98	12.125	8	10.32	13/32



Output Coupling Dimensions

A		B		C		D		Bolt Holes No.	Diameter (E)	
mm	in	mm	in	mm	in	mm	in		mm	in
102	4.02	82.5	3.25	63.5	2.50	10.0	0.39	4	10.5	0.41



Duty Definitions

PLEASURE DUTY DEFINITION	Highly intermittent operation with very large variations in engine speed and power
Average engine operating hours limit:	500 hours/year 300 hours/year for mechanical gearboxes
Typical hull forms:	Planing.
Typical applications:	Private, non-commercial, non-charter sport/leisure activities.
LIGHT DUTY DEFINITION	Intermittent operation with large variations in engine speed and power
Average engine operating hours limit:	2500 hours/year (for hydraulic gearboxes smaller than the ZF 650 series, 2000 hours/year).
Typical hull forms:	Planing and semi-displacement.
Typical applications:	Private and charter, sport/leisure activities, naval and police activities.
MEDIUM DUTY DEFINITION	Intermittent operation with some variations in engine speed and power
Average engine operating hours limit:	4000 hours/year. 3500 hours/year for gearboxes smaller than ZF 2000 series and workboat ZF W2700 series.
Typical hull forms:	Semi-displacement and displacement
Typical applications:	Charter and commercial craft (example: crew boats and fast ferries), and naval and police activities.
CONTINUOUS DUTY DEFINITION	Continuous operation with little or no variations in engine speed and power
Average engine operating hours limit:	Unlimited
Typical hull forms:	Displacement.
Typical applications:	Heavy duty commercial vessels, tugs, fishing boats.

Duty Ratings

Ratings apply to marine diesel engines at the indicated speeds. At other engine speeds, the respective power capacity (kW) of the transmission can be obtained by multiplying the Power/Speed ratio by the speed.

Approximate conversion factors:

1 kW = 1.36 metric hp

1 kW = 1.34 U.S. hp (SAE)

1 U.S. hp = 1.014 metric hp

1 Nm = 0.74 lb.ft.

Ratings apply to right hand turning engines, i.e. engines having counterclockwise rotating flywheels when viewing the flywheel end of the engine.

These ratings allow full power through forward and reverse gear trains, unless otherwise stated.

Contact your nearest ZF Sales and Service office for ratings applicable to gas turbines, gasoline (petrol) engines, as well as left hand turning engines, and marine transmissions for large horsepower capacity engines.

Ratings apply to marine transmissions currently in production or in development and are subject to change without prior notice.

NOTE: THE MAXIMUM RATED INPUT POWER MUST NOT BE EXCEEDED (SEE RESPECTIVE RATINGS IN THE TECHNICAL DATA SHEETS)

Safe Operating Notice

The safe operation of ZF products depends upon adherence to technical data presented in our brochures. Safe operation also depends upon proper installation, operation and routine maintenance and inspection under prevailing conditions and recommendations set forth by ZF. Damage to transmission caused by repeated or continuous emergency manoeuvres or abnormal operation is not covered under warranty. It is the responsibility of users and not ZF to provide and install guards and safety devices, which may be required by recognized safety standards of the respective country (e.g. for U.S.A. the Occupational Safety Act of 1970 and its subsequent provisions).

Monitoring Notice

The safe operation of ZF products depends upon adherence to ZF monitoring recommendations presented in our operating manuals, etc. It is the responsibility of users and not ZF to provide and install monitoring devices and safety interlock systems as may be deemed prudent by ZF. Consult ZF for details and recommendations.

Torsional Responsibility and Torsional Couplings

The responsibility for ensuring torsional compatibility rests with the assembler of the drive and driven equipment. ZF can accept no liability for gearbox noise caused by vibrations or for damage to the gearbox, the flexible coupling or to other parts of the drive unit caused by this kind of vibration. Contact ZF for further information and assistance. ZF recommends the use of a torsional limit stop for single engine powered boats, wherein loss of propulsion power can result in loss of control. It is the buyer's responsibility to specify this option, which can result in additional cost and a possible increase in installation length.

ZF can accept no liability for personal injury, loss of life, or damage or loss of property due to the failure of the buyer to specify a torsional limit stop. ZF selects torsional couplings on the basis of nominal input torque ratings and commonly accepted rated engine governed speeds. Consult ZF for details concerning speed limits of standard offering torsional couplings, which can be less than the transmission limit. Special torsional couplings may be required for Survey Society Ice Classification requirements.

